




#### DIMENSION

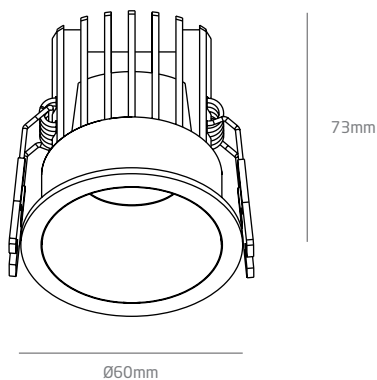

#### PRODUCT

Name	BLADE
Barcode	152K554.11-3000K
Color	Sand White
Category	Ceiling Recessed

#### LIGHT SOURCE

Type	LED
Luminous flux	560 lm
Colour temperature	3000K
Chromatic stability	Mac Adam Step 3
Colour Rendering Index	CRI90
Power	8W
Efficacy	70 lm/W
LED lifespan	50 000h
Light beam angle	38° (on request: 16°, 24°)


#### LIGHTING FIXTURE / ELECTRICAL DATA

Driver	Included - External
Voltage	36 Vdc
Constant current	200mA
Frequency	50/60 Hz
Dimming	ON-OFF (on request: DALI )
Electrical insulation class	II


#### OTHER DATA

Sealing	IP65
Recess measurements	Ø52mm
Units per package	1pcs
Material	Aluminium

POLAR DIAGRAM

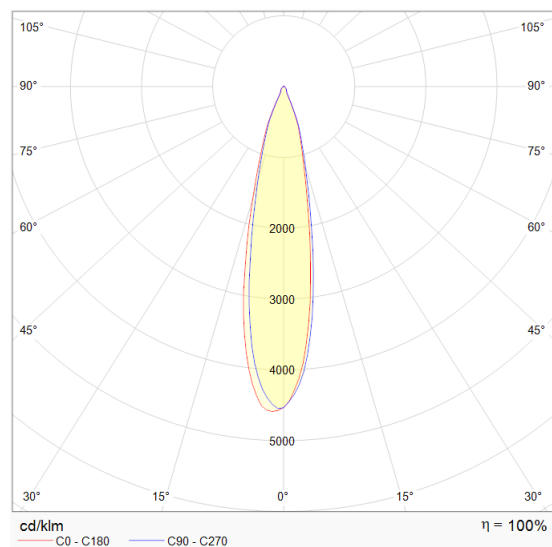

CONICAL DIAGRAM

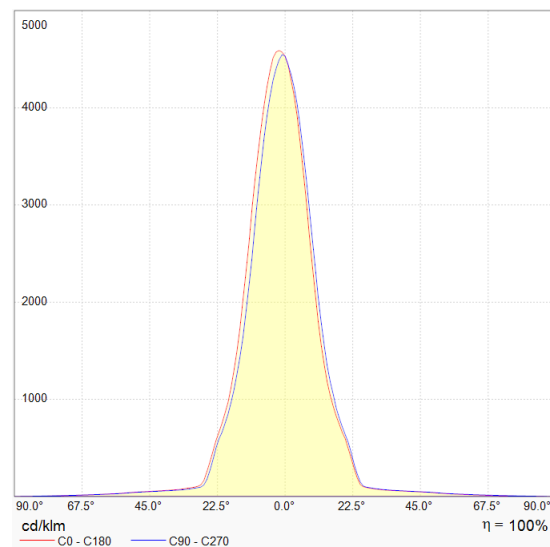

UNIFIED GLARE RATING - UGR

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	14.6	15.3	14.9	15.5	15.7	14.9	15.6	15.2	15.8	16.1
3H	15.4	16.1	15.7	16.3	16.6	15.9	16.6	16.2	16.8	17.1
4H	15.7	16.3	16.0	16.6	16.8	16.3	16.9	16.7	17.2	17.5
6H	15.8	16.4	16.2	16.7	17.0	16.7	17.2	17.0	17.5	17.8
8H	15.8	16.4	16.2	16.7	17.0	16.8	17.3	17.1	17.6	17.9
12H	15.8	16.3	16.2	16.7	17.0	16.8	17.4	17.2	17.7	18.0
X=4H Y=2H	15.1	15.7	15.4	15.9	16.2	15.3	15.9	15.7	16.2	16.5
3H	16.0	16.6	16.4	16.9	17.2	16.5	17.0	16.9	17.3	17.7
4H	16.4	16.8	16.8	17.2	17.6	17.0	17.5	17.4	17.8	18.2
6H	16.6	17.0	17.0	17.4	17.8	17.4	17.8	17.8	18.2	18.6
8H	16.6	17.0	17.1	17.4	17.8	17.6	17.9	18.0	18.4	18.8
12H	16.6	17.0	17.1	17.4	17.9	17.7	18.0	18.1	18.5	18.9
X=8H Y=4H	16.5	16.9	17.0	17.3	17.8	17.1	17.5	17.6	17.9	18.3
6H	16.8	17.1	17.3	17.6	18.1	17.6	17.9	18.1	18.4	18.8
8H	16.9	17.2	17.4	17.7	18.2	17.8	18.1	18.3	18.6	19.1
12H	17.0	17.2	17.5	17.7	18.2	18.0	18.3	18.5	18.7	19.3
X=12H Y=4H	16.5	16.9	17.0	17.3	17.8	17.1	17.4	17.5	17.9	18.3
6H	16.9	17.1	17.4	17.6	18.1	17.6	17.9	18.1	18.4	18.9
8H	17.0	17.2	17.5	17.7	18.2	17.9	18.1	18.4	18.6	19.1
Variations with the observer position at spacings:										
S=1.0H	+0.4/-0.5					+0.3/-0.4				
S=1.5H	+0.6/-1.1					+0.6/-0.9				
S=2.0H	+1.3/-1.8					+1.2/-1.4				