




## DIMENSION

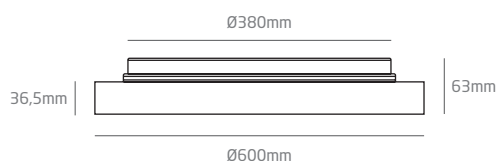

Name	ROTO 600
Barcode	172K597.11 / 172K597.10
Color	White / Black
Category	Ceiling - Surface Mounted

## PRODUCT

Type	LED
Luminous flux	3750lm - 4500lm - 5375lm - 6250lm
Colour temperature	3000K - 4000K - 5000K
Chromatic stability	Mac Adam Step 3
Colour Rendering Index	CR190
Power	30W-36W-43W-50W
Power control	DIP switch
Efficacy	125 lm/W
LED lifespan	>70 000h (L80B20)
Lighting distribution	Direct-indirect
Light beam angle - downwards	90°
Unified Glare Rating	UGR<19

## LIGHT SOURCE

## LIGHTING FIXTURE / ELECTRICAL DATA


Driver	Included
Voltage	230V
Frequency	50/60 Hz
Dimming	ON-OFF
Electrical insulation class	I

## OTHER DATA

Sealing	IP20
Units per package	1pcs
Material	Aluminium
Diffuser material	Polycarbonate
Diffuser type	Microprismatic



POLAR DIAGRAM

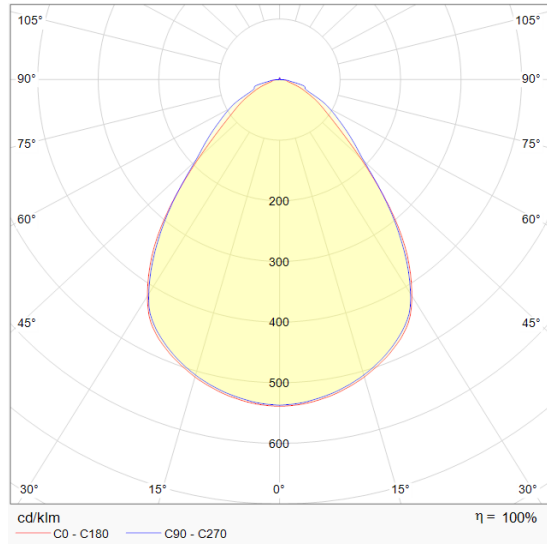

CONICAL DIAGRAM

