




DIMENSION

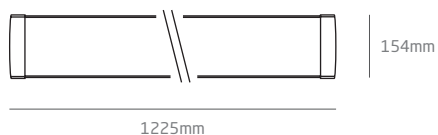

PRODUCT

Name	XITA
Barcode	172K599.11 / 172K599.10
Color	White / Black
Category	Surface Mounted

LIGHT SOURCE

Type	LED
Luminous flux	3250lm - 3900lm - 4550lm - 5400lm
Colour temperature	3000K - 4000K - 5000K
Chromatic stability	Mac Adam Step 3
Colour Rendering Index	CRI>80
Power	25W-30W-35W-40W
Power control	DIP switch
Efficacy	130lm/W
LED lifespan	>80 000h (L80B20)
Lighting distribution	Direct
Light beam angle	85°
Unified Glare Rating	UGR<20
Working temperature	-20°C..... +55°C


LIGHTING FIXTURE / ELECTRICAL DATA

Driver	Included
Voltage	230V
Frequency	50/60 Hz
Dimming	ON-OFF
Electrical insulation class	I

OTHER DATA

Sealing	IP20
Units per package	1pcs
Net weight	2,1kg
Material	Steel
Diffuser material	PMMA
Diffuser type	Microprismatic

POLAR DIAGRAM

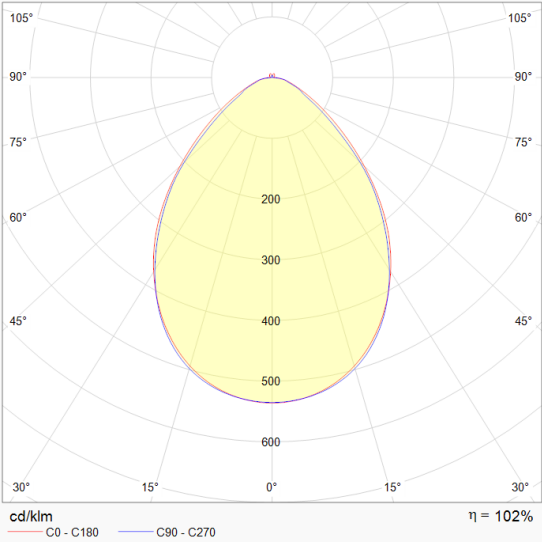

CONICAL DIAGRAM

